


The ditch and conduit system **SHALL BE** inspected by FRECC personnel before backfilling

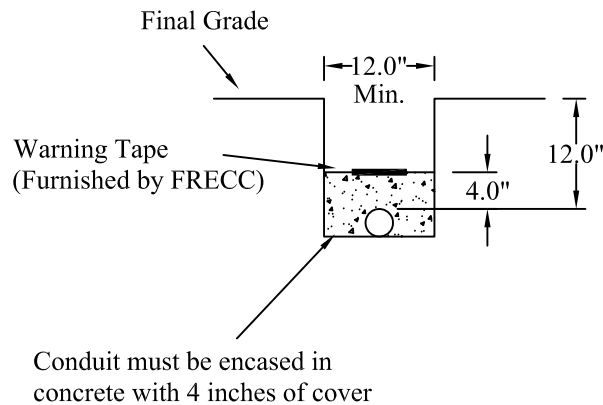

NOTES:

Precautions **SHALL BE** made to prevent excavated material from falling into the ditch

All conduit **SHALL BE** furnished and installed by the member/developer

All conduit **SHALL BE** 3 inch Schedule 40 Electrical Grade PVC unless otherwise specified

Elbows **SHALL NOT BE** used except at locations specified in "Riser Detail" drawings

All conduit joints **SHALL BE** cemented

All concrete **SHALL BE** completed by member/developer


Foreign utilities **SHALL NOT** use the same ditch as the FRECC conduit system (See Communication Exception)

All selected backfill **SHALL BE** free from stones, rock, or other material which might damage conduit system

Communication Utilities Exceptions:

Communication cables installed in Electrical Grade PVC may be adjacent to the FRECC conduit system in the same ditch

Communication cables not installed in Electrical Grade PVC may be installed in the same ditch as the FRECC conduit system above the concrete encasement

 FARMERS RECC <small>A Sustainable Energy Cooperative</small>		Farmers Rural Electric Cooperative Corp. 504 S. Broadway, Glasgow, KY 42141 P.O. Box 1298, Glasgow, KY 42142 (270) 651-2191 Office (270) 651-7332 Fax	
		SPECIFICATION: Ditch Detail - Reduced Depth	
DRAWN BY:		DATE:	
Chuck Bishop		12/1/2008	
APPROVED BY:		DATE:	
Chuck Bishop		12/1/2008	
SCALE:	NOTES:		
None			