


The ditch and conduit system
SHALL BE inspected by
 FRECC personnel before
 backfilling

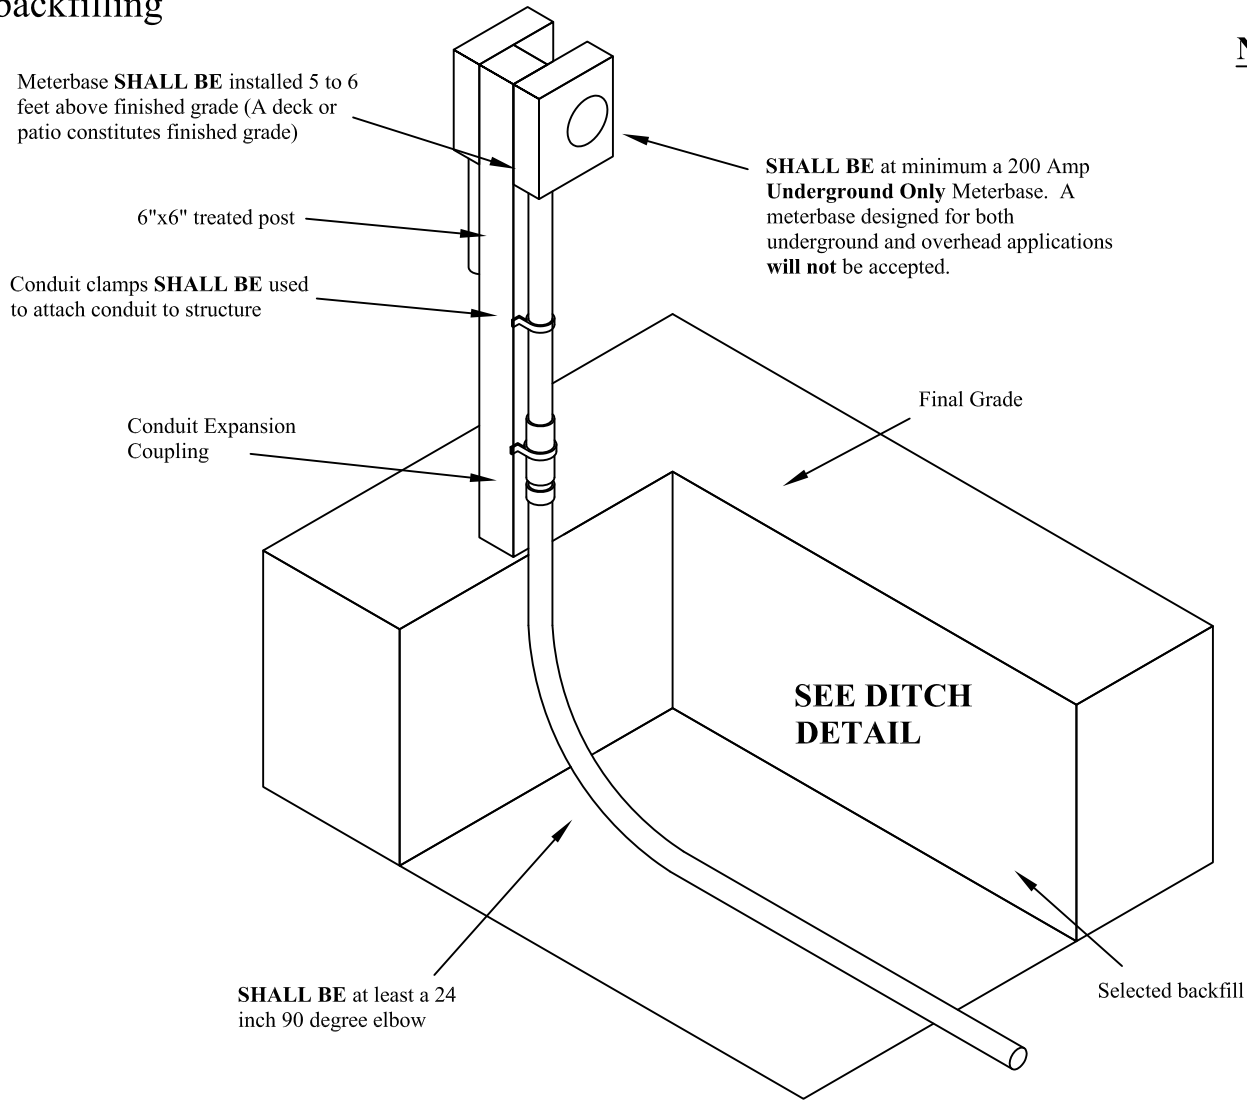

NOTES:

See appropriate "Ditch Detail" specification for ditch dimensions and requirements

Member/Developer **SHALL** coordinate with FRECC personnel about the location of the meterbase before installation

All conduit **SHALL BE** furnished and installed by the member/developer


All conduit **SHALL BE** 3 inch Schedule 40 Electrical Grade PVC unless otherwise specified

All conduit above grade **SHALL BE** Schedule 80 Electrical Grade PVC

All conduit joints **SHALL BE** cemented

A poly pull rope with a minimum 150 lb tensile strength **SHALL BE** used (Pull rope **SHALL BE** installed after all joints have been cemented)

All selected backfill **SHALL BE** free from stones, rock, or other material which may damage the conduit system

	Farmers Rural Electric Cooperative Corp. 504 S. Broadway, Glasgow, KY 42141 P.O. Box 1298, Glasgow, KY 42142 (270) 651-2191 Office (270) 651-7332 Fax	
	SPECIFICATION: Riser Detail - UG Meterbase on Pedestal (Opt 2)	
DRAWN BY: Chuck Bishop	DATE: 12/1/2008	
APPROVED BY: Chuck Bishop	DATE: 12/1/2008	
SCALE: None	NOTES:	