

The ditch and conduit system **SHALL BE** inspected by FRECC personnel before backfilling

NOTES:

See appropriate "Ditch Detail" specification for dimensions and requirements

Member/Developer **SHALL** coordinate with FRECC personnel about the location of the conduit riser before installation

All conduit **SHALL BE** furnished and installed by the member/developer

All conduit **SHALL BE** 3 inch Schedule 40 Electrical Grade PVC unless otherwise specified


All conduit above grade **SHALL BE** Schedule 80 Electrical Grade PVC

All conduit joints **SHALL BE** cemented


All selected backfill **SHALL BE** free from stones, rock, or other material which may damage the conduit system

All conduit **SHALL BE** temporarily capped to prevent water or debris from entering the system

DO NOT EXPOSE MORE THAN ONE SIDE OF POLE

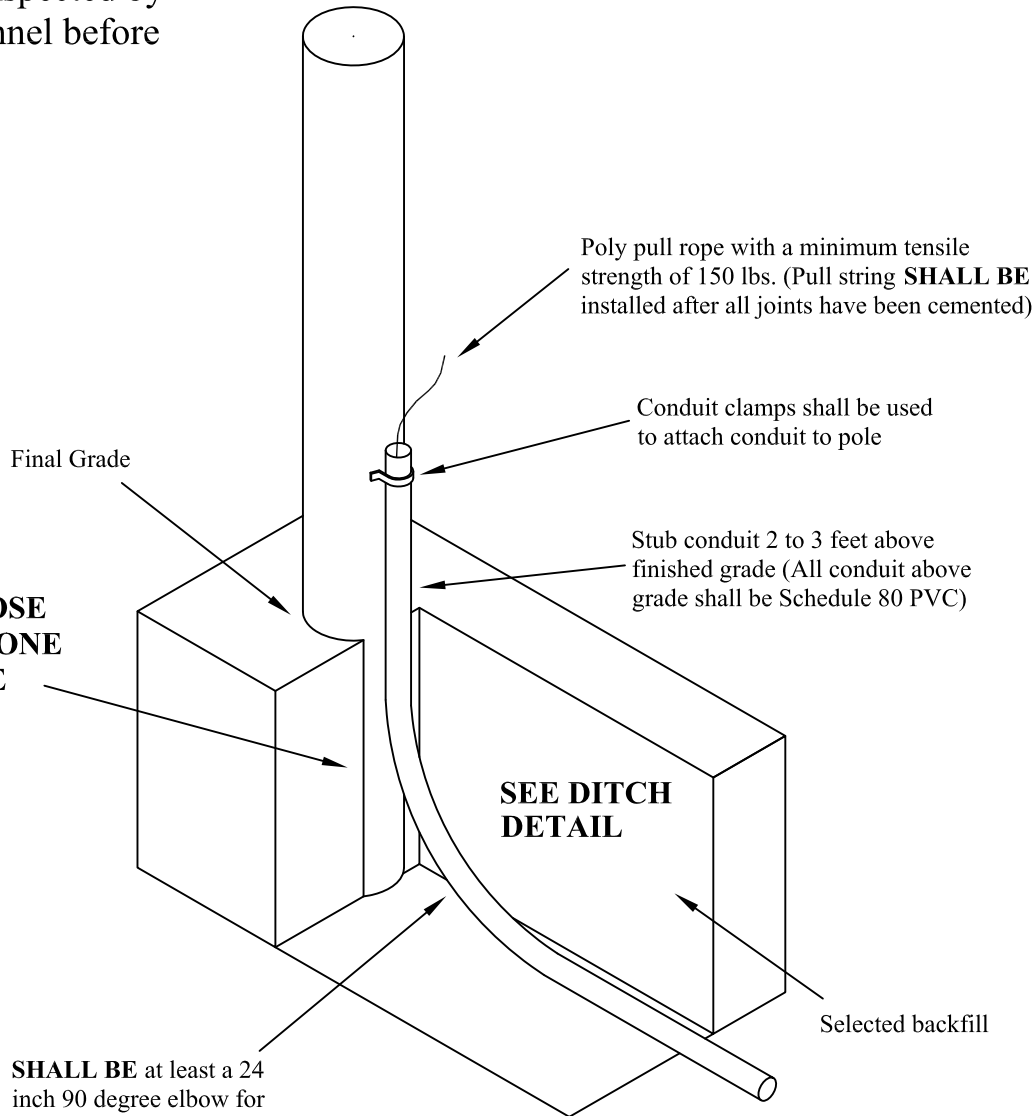

SHALL BE at least a 24 inch 90 degree elbow for secondary
SHALL BE at least a 36 inch 90 degree elbow for primary

 FARMERS RECC <small>A Sustainable Energy Cooperative</small>		Farmers Rural Electric Cooperative Corp. 504 S. Broadway, Glasgow, KY 42141 P.O. Box 1298, Glasgow, KY 42142 (270) 651-2191 Office (270) 651-7332 Fax	
		SPECIFICATION: Riser Detail - Single Conduit (Prim or Sec)	
DRAWN BY:		DATE:	
Chuck Bishop		12/1/2008	
APPROVED BY:		DATE:	
Chuck Bishop		12/1/2008	
SCALE:	NOTES:		
None			